

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
23 May 2002 (23.05.2002)

PCT

(10) International Publication Number
WO 02/40603 A2

- (51) International Patent Classification⁷: **C09D 4/00**
- (21) International Application Number: **PCT/US01/47029**
- (22) International Filing Date:
9 November 2001 (09.11.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
2000-350089 16 November 2000 (16.11.2000) **JP**
- (71) Applicant (*for all designated States except US*): **3M INNOVATIVE PROPERTIES COMPANY** [US/US]; 3M Center, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): **YANOME, Hideto** [JP/JP]; 11-2-103 Oyama 2-chome, Sagamihara-city, Kanagawa 229-11 (JP).
- (74) Agents: **JORDAN, Robert, H.** et al.; Office of Intellectual Property Counsel, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), DM, DZ, EC, EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— *without international search report and to be republished upon receipt of that report*
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: **WATER-REPELLENT, OIL-REPELLENT AND SOIL RESISTANT COATING COMPOSITION**

(57) Abstract: A coating composition capable of providing a coating film which has sufficiently high water repellency, oil repellency and soil resistance and which ensures high adhesion property to a substrate. A coating composition comprising a copolymer obtained by copolymerizing monomers comprising a fluoroaliphatic group-containing unsaturated ester monomer and an unsaturated silane monomer.

WATER-REPELLENT, OIL-REPELLENT AND SOIL
RESISTANT COATING COMPOSITION

Field of the Invention

5 The present invention relates to a surface coating composition, more specifically, a moisture-proof and oil-resistant coating composition for the application to the surface of parts of electronic instruments.

10 Background


 A coating agent comprising a compound having a long-chain fluoroaliphatic group typically exhibits a lower critical surface tension as compared with other materials, and therefore this has been heretofore widely used as a
15 surface modifier for attaining water repellency, oil repellency and soil resistance. Such modifiers which are now used typically include a homopolymer or a copolymer obtained by radical polymerization of an α, β -unsaturated ester monomer having a fluoroaliphatic group. These
20 polymers are, however, low in the surface hardness and do not exhibit sufficiently high abrasion resistance and durability. Furthermore, these polymers tend to be inadequate film-formers and in adhering to a substrate. Therefore, coating films of such polymers are
25 disadvantageously peeled off by just a light rubbing. Also, the bond to a substrate is attained by hydrogen bonding; therefore the bonding force is weak and when water is splashed on the edge surface of the coating film, the coating film is disadvantageously peeled off.

30 U.S. Patent Nos. 3,931,454 and 4,849,291 describe coating compositions comprising a fluoroalkyl (meth)acrylate/ (meth)acrylic acid copolymer where a part of fluoroalkyl (meth)acrylate is displaced by (meth)acrylic

acid. The references teach that by introducing (meth)acrylic acid into the copolymer, the adhesion property to a substrate is improved. However, even by such improvement, the above-described problem cannot be
 5 completely overcome.

Japanese Unexamined Patent Publication (Kokai) No. 58-172245 discloses, as a treating agent for imparting water repellency, oil repellency, soil resistance and low reflection property to a glass surface, a glass surface
 10 treating agent, comprising:


(a) a polyfluoroalkyl group-containing silane compound represented by the formula:



15

or a partially hydrolyzed condensate thereof and

(b) a silane compound represented by the formula



wherein R_f is a polyfluoroalkyl group having from 1 to 20
 20 carbon atoms, which may have one or more ether bonds, R^1 and R^2 each is a hydrogen atom or a lower alkyl group, X is $-\text{CON}(R^2)-Q-$ or $-\text{SO}_2\text{N}(R^2)-Q-$ (wherein R^2 is the same as above and Q is a divalent organic group), A is an alkylene group, Z is a lower alkyl group, Y^1 and Y^2 each is a halogen,
 25 an alkoxy group or $R^3\text{COO}-$ (wherein R^3 is a hydrogen atom or a lower alkyl group), n is an integer of 0 or 1, a is an integer of 1 to 3, b is an integer of 0 or 1 to 2, and c is an integer of 0 or 1 to 2). By using the above-described polyfluoroalkyl group-containing silane compound mixed with
 30 alkoxy or halogenosilane, the crosslinking degree on the surface adhering to glass increases and thereby the adhesion property, water repellency and oil repellency are improved. However, in this treating agent, the component (a) has an

Rf:Si ratio of 1:1 and the component (b) contains Si, as a result, the density of Rf group in the entire composition is low and silicon is contained in a large amount. If the silicon content is large, oil repellency of the composition is disadvantageously inhibited. Furthermore, the component (a) contained in the treating agent has a low molecular weight, and therefore it is difficult to form a uniform coating film and the permeation resistance to oil of the film is considered to be low.

10 A coating composition not containing the above-described low molecular weight fluoro-containing compound but containing a fluorine-containing polymer is also known. Japanese Unexamined Patent Publication (Kokai) No. 11-349888 discloses a coating composition comprising a fluoro-resin
15 having an aliphatic ring structure in the main chain, a partially hydrolyzed condensate of alkoxysilane and a solvent. The partially hydrolyzed condensate of alkoxysilane in this composition is expected to act to overcome the defects in physical properties of the
20 fluoro-resin, such as low glass transition temperature and small modulus and high coefficient of linear expansion at high temperatures. In the adhering to a substrate, this composition is considered to be bonded to the substrate through the partially hydrolyzed condensate of alkoxysilane,
25 because the fluoro-resin usually exhibits low adhesion to a substrate. The reference teaches that in order to improve the adhesive property to a substrate, a compound having a hydrolyzable group capable of reacting with the partially hydrolyzed condensate of alkoxysilane and a site capable of
30 reacting with the functional group of the fluoro-resin can be used as a coupling agent. However, with this composition, direct adhesion between the fluoro-resin and the substrate cannot be attained interfering with formation of a uniform

coating film having sufficiently high water repellency, oil repellency and soil resistance.

Accordingly, the need exists for a coating composition capable of providing a coating film having sufficiently high water repellency, oil repellency and soil resistance and ensuring high adhesion property to a substrate.


Summary of Invention

In brief summary, the present invention provides a coating composition comprising a copolymer obtained by copolymerizing monomers comprising a fluoroaliphatic group-containing unsaturated ester monomer and an unsaturated silane monomer.

When this coating composition is used, a coating having sufficiently high water repellency, oil repellency and soil resistance and ensuring high adhesion property to a substrate can be obtained.

Detailed Description of Illustrative Embodiments

The fluoroaliphatic group-containing unsaturated ester monomer for the copolymer in the composition of the present invention acts to impart water repellency, oil repellency and soil resistance to the resultant coating. The ester monomer is a compound which contains an aliphatic group at least partially substituted by fluorine, particularly an alkyl group at least partially substituted by fluorine, and which has a polymerizable ethylenic unsaturated carbon-carbon double bond. More specifically, the fluoroaliphatic group-containing unsaturated ester monomer includes a compound represented by the following formula:



wherein Rf is a linear, branched or cyclic and at least partially fluorinated, aliphatic group, for example, an at least partially fluorinated alkyl group, preferably a completely fluorinated alkyl group having from 2 to 12 carbon atoms, R¹ is H or CH₃, and Q is a lower alkylene group, for example, -CH₂- or -CH₂CH₂-, or -SO₂NR²-lower alkylene group, for example, -SO₂NR²-CH₂- or -SO₂NR²-CH₂CH₂-, wherein R² is hydrogen or a lower alkyl group, for example, -CH₃ or -C₂H₅.


As the number of carbon atoms or the number of fluorine substituents is larger in Rf, higher water repellency, higher oil repellency and higher soil resistance are obtained. However, if the number of carbon atoms is excessively large, the copolymer is considered likely to accumulate in vital tissues. Accordingly, Rf is preferably a fluoroaliphatic group having from 3 to 7 carbon atoms, more preferably from 3 to 6 carbon atoms. The terminal group of Rf is preferably a completely fluorinated -CF₃ group, because high water repellency, oil repellency and soil resistance are obtained.

In order not to inhibit the water repellency and the like of the copolymer, Q is a lower alkylene group, preferably -CH₂- or -CH₂CH₂-. Specific examples of the monomer include F(CF₂)₆CH₂OC(=O)C(CH₃)=CH₂, C₇F₁₅SO₂N(C₂H₅)C₂H₄OC(=O)C(CH₃)=CH₂, C-C₆F₁₁CH₂OC(=O)C(CH₃)=CH₂, C₆F₁₃C₂H₄OC(=O)CH=CH₂, (CF₃)₂CF(CF₂)₂C₂H₄OC(=O)CH=CH₂, H(CF₂)₄CH₂OC(=O)CH=CH₂, F(CF₂)₄C₂H₄OC(=O)CH=CH₂ and F(CF₂)₃CH₂OC(=O)CH=CH₂. These monomers can be produced by conventional methods, for instance, as described in U.S. Patent Nos. 2,803,615 and 2,841,573.

The fluoroaliphatic group-containing unsaturated ester monomer typically constitutes at least 50 wt% or more, preferably 70 wt% or more, based on the total weight of the

ester monomer and the unsaturated silane monomer. With this range, sufficiently high water repellency, oil repellency and soil resistance can be imparted to the coating.

The unsaturated silane monomer portion of the copolymer facilitates adhesion of the resultant coating to a substrate. The unsaturated silane monomer is a silane-type compound containing a silicon atom capable of increasing the adhesion property to a substrate and also having a polymerizable ethylenic unsaturated carbon-carbon double bond. More specifically, the unsaturated silane monomer includes a compound represented by the following formula:

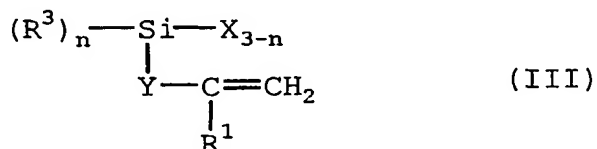

wherein R^1 is H or CH_3 , R^3 is hydrogen or a lower alkyl group, for example, a methyl or ethyl group, X is alkoxy, halogen or $\text{RCOO}-$, wherein R is hydrogen or a lower alkyl group, for example, a methyl or ethyl group, Y is a single bond or $-\text{CH}_2-$, and n is an integer of 0, 1 or 2. Specific examples of the compound where X is an alkoxy group include vinyltrialkoxysilane such as $(\text{CH}_3\text{O})_3\text{SiCH}=\text{CH}_2$ and $(\text{C}_2\text{H}_5\text{O})_3\text{SiCH}=\text{CH}_2$, and allyltrialkoxysilane such as $(\text{CH}_3\text{O})_3\text{SiCH}_2\text{CH}=\text{CH}_2$. Specific examples of the compound where X is a halogen include $\text{CH}_2=\text{CHSiCl}_3$. Specific examples of the compound where X is $\text{RCOO}-$ include $(\text{CH}_3\text{COO})_3\text{SiCH}=\text{CH}_2$.

The unsaturated silane monomer usually constitutes an amount of 1 to 50 wt% based on the total weight of the fluoroaliphatic group-containing unsaturated ester monomer and the unsaturated silane monomer. If the silane monomer is contained at less than 1.0 wt%, the improvement effect on the adhesion property of the coating to a substrate may not

be clearly brought out, whereas if it exceeds 50 wt%, the water repellency and the oil repellency may decrease. In view of the balance between the adhesion property of the coating to a substrate and the performance such as water
5 repellency, the amount of the unsaturated silane monomer is preferably from 1 to 30 wt%, more preferably from 1 to 10 wt%, still more preferably from 1.5 to 4 wt%.

As long as the desired properties of coatings of the present invention such as water repellency, oil repellency,
10 soil resistance and adhesion to a substrate are not undesirably impaired, the copolymer in the composition of the present invention may contain a monomer other than the above-described fluoroaliphatic group-containing unsaturated monomer and unsaturated silane monomer, which is
15 copolymerizable with these monomers, such as (meth)acrylic acid, ethylene, olefin and styrene. However, typically the copolymer preferably consists essentially of above-described two kinds of monomers.

The copolymer may be produced by a conventional radical
20 polymerization method. To speak more specifically, a fluoroaliphatic group-containing unsaturated ester monomer and an unsaturated silane monomer are dissolved in an appropriate solvent such as hydrofluorocarbon ether in the presence of a radical polymerization initiator such as
25 azobisisobutyronitrile and then polymerized under heating at 60 to 75°C for 10 to 20 hours, whereby the copolymer can be obtained.

The copolymer in the coating composition preferably has a molecular weight of 100 to 50,000, more preferably from
30 500 to 5,000. If the molecular weight is too small, poor film-forming performance may result, whereas if the molecular weight is excessively large, the viscosity of the coating composition typically tends to increase and it

becomes more difficult to apply the resultant composition.

The coating composition preferably contains a solvent so as to improve the coatability. Preferably, the solvent utilized in the present invention is a fluorinated solvent.

5 Illustrative examples of suitable fluorinated solvents include those which are non-ozone depleting and non-flammable, such as highly fluorinated hydrofluorocarbons (HFCs) and hydrofluorocarbon ethers (HFEs). The term "hydrofluorocarbon" as used herein means a compound
10 containing carbon, hydrogen, fluorine and no other atoms. The term "hydrofluorocarbon ether" as used herein means a compound containing carbon, hydrogen, fluorine, one or more ether oxygen atoms, and optionally one or more additional catenary heteroatoms within the carbon backbone, such as
15 trivalent nitrogen or sulfur, and being free of chlorine, bromine and iodine atoms.


HFCs and HFEs have low surface tension and low viscosity as compared with other organic solvents. Therefore, a uniform and continuous, i.e., pore-free,
20 coating can be obtained even if the substrate to be covered has a complicated shape. As a result, even small spaces or small holes can be coated with the composition. Furthermore, the composition can be coated as a thin film. As compared with common ketone or ester solvents, HFCs and
25 HFEs typically do not attack organic materials, and therefore can be effectively used even if the substrate is a resin, with confidence that the substrate will not be degraded by the solvent. In addition, HFCs and HFEs are very low in the water solubility, and therefore the coating
30 composition obtained can be prevented from gelling due to the hydrolysis of the silane monomer unit of the copolymer and can be favored with high storage stability. Use of a solvent which readily absorbs moisture, such as alcohol, is

typically not preferred because due to the partial hydrolysis of the silane monomer unit, the condensation proceeds and gelling is caused. HFCs and HFEs are preferably liquid and non-flammable at room temperature
5 (about 20°C) and atmospheric pressure (1 atm).

Illustrative examples of useful HFCs include those having a 3- to 8-carbon backbone, with 4- to 9-carbon backbone being preferred. The carbon backbone can be straight, branched, cyclic, or mixtures of these.
10 Illustrative examples of useful HFCs include compounds having more than approximately 5 molar percent fluorine substitution and less than 95 molar percent fluorine substitution, based on the total number of hydrogen and fluorine atoms bonded to the carbon backbone. Preferred
15 HFCs include $\text{CF}_3\text{CFHCFHCF}_2\text{CF}_3$, $\text{C}_5\text{F}_{11}\text{H}$, $\text{C}_6\text{F}_{13}\text{H}$, $\text{CF}_3\text{CF}_2\text{CH}_2\text{CH}_2\text{F}$, $\text{CHF}_2\text{CF}_2\text{CF}_2\text{CHF}_2$, 1,2-dihydroperfluorocyclopentane and 1,1,2-trihydroperfluorocyclopentane. Some illustrative examples of useful HFCs include HFCs available under the VERTRELTM, available from E. I. duPont de Nemours & Co., and under the
20 ZEORORA-HTM, available from Nippon Zeon Co. Ltd., Tokyo, Japan.

Generally the more preferred fluorinated solvents are HFEs, as they exhibit the best combination of solvency along with optimum safety (non-flammability and low toxicity) and
25 environmental (non-ozone depleting and low global warming) properties. HFEs are chemical compounds containing carbon, fluorine, hydrogen, one or more ether oxygen atoms, and optionally one or more additional catenary heteroatoms within the carbon backbone, such as sulfur or trivalent
30 nitrogen. The HFE can be straight-chained, branched-chained, or cyclic, or a combination thereof, such as alkylcycloaliphatic. Preferably, the HFE is free of unsaturated portions.

These highly fluorinated ethers may be depicted by the formula below:



5 wherein a is a number from 1 to 3 inclusive and R^4 and R^5 are the same or are different from one another and are selected from the group consisting of alkyl, aryl, and alkylaryl groups. At least one of R^4 and R^5 contains at least one fluorine atom, and at least one of R^4 and R^5 contains at
10 least one hydrogen atom, either or both groups R^4 and R^5 can optionally contain one or more catenary heteroatoms, e.g., oxygen, sulfur, or nitrogen, and preferably the total number of fluorine atoms in the HFE at least equals the total number of hydrogen atoms. R^4 and R^5 may also be linear,
15 branched, or cyclic, and may contain one or more unsaturated carbon-carbon bonds, though preferably R^4 and R^5 are both saturated.

Illustrative examples of suitable HFEs include: (1) segregated HFEs, wherein ether-bonded alkyl or alkylene,
20 etc., segments of the HFE are either perfluorinated (e.g., perfluorocarbon) or non-fluorinated (e.g., hydrocarbon), but not partially fluorinated; and (2) non-segregated HFEs, wherein at least one of the ether-bonded segments is neither perfluorinated nor fluorine-free but is partially
25 fluorinated (i.e., contains a mixture of fluorine and hydrogen atoms). Segregated HFEs are the most preferred fluorinated solvents as they demonstrate the shortest atmospheric lifetimes and lowest global warming potentials.

Segregated HFEs include HFEs which comprise at least
30 one mono-, di-, or trialkoxy-substituted perfluoroalkane, perfluorocycloalkane, perfluorocycloalkyl-containing perfluoroalkane, or perfluorocycloalkylene-containing perfluoroalkane compound. These HFEs are described, for

example, in PCT Publication No. WO 96/22356, and can be represented by the formula below:



5

wherein:

x is from 1 to about 3, and R_f' is a perfluorinated hydrocarbon group having a valency x, which can be straight, branched, or cyclic, etc., and preferably contains from 2 to
10 9 carbon atoms, and more preferably contains from 3 to 6 carbon atoms;

each R_h is independently a linear or branched alkyl group having from 1 to 3 carbon atoms;

wherein either or both of the groups R_f' and R_h can
15 optionally contain one or more catenary heteroatoms; and

wherein the sum of the number of carbon atoms in the R_f' group and the number of carbon atoms in the R_h group(s) is preferably between 4 and 10.


Preferably, x is 1. Most preferable R_f' groups include
20 C_3F_7 -isomers (i.e., n-, iso-), C_4F_9 -isomers (i.e., n-, iso-, sec-, tert-), C_5F_{11} -isomers, C_6F_{13} -isomers, and perfluorocyclohexyl; and most preferable R_h groups include methyl and ethyl.

Preferred segregated HFEs include n- $C_3F_7OCH_3$,
25 $(CF_3)_2CFOCH_3$, n- $C_4F_9OCH_3$, $(CF_3)_2CFCH_2OCH_3$, n- $C_3F_7OC_2H_5$, n- $C_4F_9OC_2H_5$, $(CF_3)_2CFCH_2OC_2H_5$, $(CF_3)_3COCH_3$, $(CF_3)_3COC_2H_5$, $CF_3CF(OCH_3)CF(CF_3)_2$, $CF_3CF(OC_2H_5)CF(CF_3)_2$, $CF_3CF_2CF_2CF(OC_2H_5)CF(CF_3)_2$, $CF_3CF(CF_3)CF_2OCH_3$, $CF_3CF(CF_3)CF_2OC_2H_5$, $C_8F_{17}OCH_3$, $CH_3O(CF_2)_4OCH_3$, $C_5F_{11}OC_2H_5$, $C_3F_7OCH_3$, $CF_3OC_2F_4OC_2H_5$,
30 $C_3F_7OCF(CF_3)CF_2OCH_3$, $(CF_3)_2CFOCH_3$, $C_4F_9OC_2F_4OC_2F_4OC_2H_5$, $C_4F_9O(CF_2)_3OCH_3$ and 1-dimethoxyperfluorocyclohexane, and mixtures thereof. Segregated HFEs are available as 3MTM NOVECTM HFE-7100, HFE-7200 and HFE-7500 engineering fluids

from Minnesota Mining and Manufacturing Company.

Also useful as fluorinated solvents are azeotropes and azeotrope-like compositions which are blends of segregated HFES with non-halogenated organic compounds. Especially
5 useful are the azeotropes and azeotrope-like compositions consisting of blends of organic solvents with $C_4F_9OCH_3$ (described in PCT Publication No. WO 96/36689), $C_4F_9OC_2H_5$ (described in PCT Publication No. WO 96/36688) and $C_3F_7OCH_3$ (described in PCT Publication No. WO 98/37163).

10 Illustrative examples of useful non-segregated HFES include alpha-, beta- and omega-substituted hydrofluoroalkyl ethers such as those described in U.S. Patent No. 5,658,962 (Moore et al.), incorporated herein by reference, and those described by Marchionni et al. in "Hydrofluoropolyethers,"
15 Journal of Fluorine Chemistry 95 (1999), pp. 41 - 50, both of which can be described by the general structure shown below:



20

wherein:

X' is either F, H, or a perfluoroalkyl group containing from 1 to 3 carbon atoms which is optionally hydro-substituted in the omega positions;

25 each R_f' is independently selected from the group consisting of $-CF_2-$, $-C_2F_4-$, and $-C_3F_6-$, wherein, when X' is perfluorinated, X' and at least a portion of the adjacent R_f' group taken together can form a perfluorocycloalkyl group;


R'' is a divalent organic radical having from 1 to 3
30 carbon atoms, and may be perfluorinated, unfluorinated or partially fluorinated; and

y is an integer from 1 to 7;

wherein when X' is F, R'' contains at least one F atom; and

wherein preferably the total number of carbon atoms is between 3 and 8.

Illustrative examples of non-segregated HFES useful in the present invention include, but are not limited to, the following compounds:

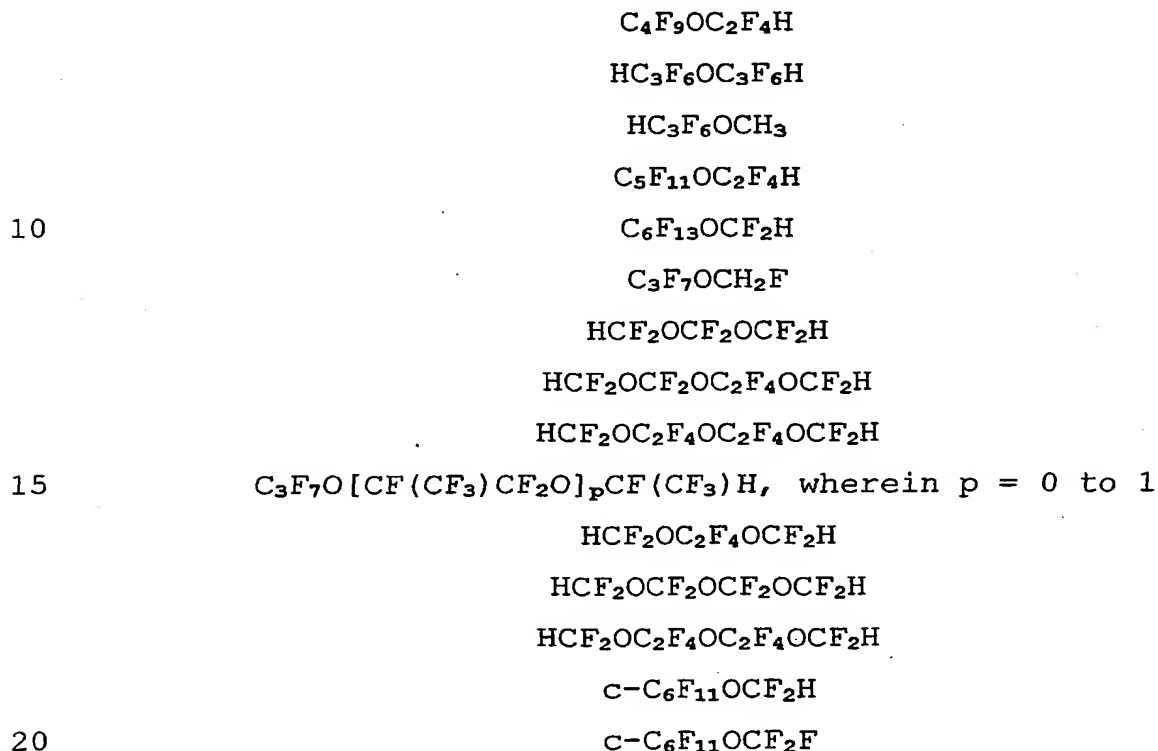

Preferred non-flammable, non-segregated HFES include $C_4F_9OC_2F_4H$, $C_6F_{13}OCF_2H$, $HC_3F_6OC_3F_6H$, $C_3F_7OCH_2F$, $HCF_2OCF_2OCF_2H$, $HCF_2OC_2F_4OCF_2H$, $HCF_2OCF_2OCF_2OCF_2H$, $HCF_2OCF_2CF_2OCF_2H$, $HC_3F_6OCH_3$, $HCF_2OCF_2OC_2F_4OCF_2H$, and mixtures thereof. Several non-segregated HFES useful herein are available from Ausimont Corp., Milano, Italy, under the GALDEN HTM.

Coating compositions of the present invention may be coated by any conventional method, e.g., spin coating, dipping, potting, die coating or spray coating. The coating method is appropriately selected according to the shape of the substrate to be coated or the required thickness of the coating film. In the case where the coating composition contains a solvent, the composition may be heated after the

coating on a substrate to remove the solvent. It is considered that the monomer moiety derived from the silane unsaturated monomer in the copolymer is hydrolyzed and causes a chemical reaction with a functional group on the substrate, such as OH group, whereby a coating film having high adhesion property is formed on a substrate. This hydrolysis easily takes place at room temperature using the moisture content in the environment. Therefore, even if a special treatment is not applied to the coating solution after the coating, a coating film having high adhesion property can be formed at a sufficiently high speed. Of course, the coating composition may be coated by elevating the substrate temperature and increasing the environmental moisture content at the time of coating. Furthermore, a quick dry treatment such as baking may also be performed.

Coating compositions of the present invention can form coating films having good adhesion property on any of organic, inorganic and metal substrates. For example, coating compositions of the present invention can be used as an oil diffusion-preventing coating (a coating for preventing, for example, diffusion of motor axis lubricating oil, diffusion of lubricating oil for gear shaft of clock parts or the like, leakage of lubricating grease for bearing, or diffusion of grease for sliding parts), a moisture-proof coating (a coating for moisture proofing of, for example, clock parts, precision instrument parts, electric substrate, capacitor or sensor), an insulating coating (insulation of, for example, capacitor or sensor), an antireflection coating (for example, pellicle film or protective film of pellicle film), an antifouling coating (a coating for, for example, preventing adhesion of fingerprint, oil or dusts to the optical or electronic parts, improving capability of removing these adhered soils,

preventing flux creeping, or preventing an organic material from adhering to HDD head) or a weather-resistant protective coating (a coating for protecting, for example, an electric substrate from moisture, water droplet or oil).

5

Examples

The present invention is further described in the following illustrative Examples.

10 Production of Coating Composition

Into a reactor, fluoroalkyl (meth)acrylate (fluoroaliphatic group-containing unsaturated ester monomer) and vinyl alkoxysilane (unsaturated silane monomer) were charged. Thereto, $n\text{-C}_4\text{F}_9\text{OC}_2\text{H}_5$ as a solvent and
15 azobisisobutyronitrile (ABIN) as an initiator were added. The resulting mixture was shaken by a shaker for about 5 minutes to completely dissolve the monomers and initiator and therein, dry nitrogen was bubbled for about 3 minutes using a glass Pasteur. Then, the reactor was sealed and set
20 in a rotary constant temperature water bath to allow the polymerization to proceed at 65°C for 16 hours. Thereafter, the reactor was taken out from the constant temperature water bath and then allowed to cool to room temperature. The reaction solution was transferred to a measuring flask
25 and the solvent was removed by an evaporator. As a result, a transparent fluororesin copolymer was obtained and the weight thereof was measured. Again, $n\text{-C}_4\text{F}_9\text{OC}_2\text{H}_5$ was added to have a fluororesin concentration of 2 wt% and under irradiation of ultrasonic wave, the fluororesin was
30 dissolved in the solvent. The resulting solution was used as a coating solution. In another example, a coating solution containing a terpolymer obtained from the monomers further containing an acrylic acid as a comonomer was

produced.

For comparison, a coating solution containing a homopolymer obtained only from fluoroalkyl (meth)acrylate free of an unsaturated silane monomer, and a coating solution containing a copolymer obtained from fluoroalkyl (meth)acrylate free of an unsaturated silane monomer and an acrylic acid ($\text{CH}_2\text{CH}-\text{C}(=\text{O})\text{OH}$) were produced.

Evaluation Procedure

10

a) Water-repellent and oil-repellent properties

The water-repellent and oil-repellent properties were evaluated based on the measurement of a stationary contact angle to the test solution. A previously cleaned glass plate of 76x16 mm was dipped in the coating solution (room temperature) prepared above, then quickly pulled up and dried to obtain a specimen. On the thus-obtained specimen, (i) pure water, (ii) silicone oil (KF-96-20cp produced by Shin-Etsu Kagaku Kogyo K.K.) or (iii) n-hexadecane (produced by Wako Junyaku Kogyo K.K.) was dropped and the contact angle was measured at 25°C.

20

b) Water resistance test

The water resistance was evaluated by the dropping of water droplet. In the same manner as in a) above, a glass plate was partially dipped in the coating solution to obtain a partially coated specimen. This specimen was inclined at about 45° and from the portion about 5 mm upward the boundary between the area adhered with the coating film and the area not adhered with, 5 water droplets were continuously dropped using a syringe to allow the water droplets to run down toward the boundary. Then, the degree of the coating film peeled off was observed with a naked

30

eye. It was observed that when a water droplet crawled under the film, the film was lifted like a scale and peeled off. In Table 1, when the film was peeled off, the specimen was rated x, and when not peeled off, the specimen was rated

5 ■.

c) Tests of film-forming property, film hardness and adhesion property

The film-forming property, film hardness and adhesive property were tested by the pencil scratch measurement according to JIS K5400 84.1 using a pencil scratch tester manufactured by Rikagaku Kogyo Sha. The load was 500 g.

Example 1:

15 Using $F(CF_2)_6CH_2OC(=O)C(CH_3)=CH_2$ (Component 1) as the fluoroaliphatic group-containing unsaturated ester monomer (Monomer A) and $(C_2H_5O)_3SiCH=CH_2$ (Component 10) as the unsaturated silane monomer (Monomer B), a coating solution was produced as described in General Procedure in Production of Coating Composition and coated on a glass plate as described above to form a coating film (Coating 1). The coating film obtained was evaluated on the physical properties. Also, from a monomer containing an acrylic acid (Component 12) as the comonomer (Monomer C) in addition to those monomers, a coating solution containing a terpolymer was produced according to the General Procedure described above and evaluated in the same manner (Coating 2). In Comparative Examples, a coating solution obtained by the polymerization of a monomer free of the unsaturated monomer (Monomer B), namely, a monomer consisting of Monomer A or monomers consisting of Monomers A and C, was used (Coating 3 and Coating 4, respectively). The coating formulations and

results are shown in Table 1 below.

Table 1: Coating and Evaluation Thereof

Coating No.	1	2	3 (Comparison)	4 (Comparison)
Monomer A (parts by weight)	Component 1 3.0	Component 1 3.0	Component 1 3.0	Component 1 3.0
Monomer B (parts by weight)	Component 10 0.09	Component 10 0.09	-	-
Monomer C (parts by weight)	-	Component 12 0.09	-	Component 12 0.09
Initiator (parts by weight)	0.09	0.09	0.09	0.09
Solvent (parts by weight)	22	22	22	22
Contact angle to water	118°	111°	117°	114°
Contact angle to silicone oil	-	-	-	-
Contact angle to n-hexadecane	-	-	-	-
Pencil hardness	2B	5B	<6B	<6B
Water resistance	■	■	x	x

5

Example 2:

Using $C_7F_{15}SO_2N(C_2H_5)C_2H_4OC(=O)C(CH_3)=CH_2$ (Component 2) as the fluoroaliphatic group-containing unsaturated ester monomer (Monomer A) and $(C_2H_5O)_3SiCH=CH_2$ (Component 10) as the unsaturated silane monomer (Monomer B), a coating solution was produced as described in General Procedure in Production of Coating Composition and coated on a glass plate as described above to form a coating film (Coating 5). The coating film obtained was evaluated on the physical properties. In Comparative Example, a coating solution obtained by the polymerization of a monomer free of the unsaturated monomer (Monomer B), namely, a monomer consisting of Monomer A, was used (Coating 6). The coating formulations and results are shown in Table 2 below.

20

Example 3:

Using $\text{c-C}_6\text{F}_{11}\text{CH}_2\text{OC}(=\text{O})\text{C}(\text{CH}_3)=\text{CH}_2$ (Component 3) as the fluoroaliphatic group-containing unsaturated ester monomer (Monomer A) and $(\text{C}_2\text{H}_5\text{O})_3\text{SiCH}=\text{CH}_2$ (Component 10) as the unsaturated silane monomer (Monomer B), a coating solution was produced as described in General Procedure in Production of Coating Composition and coated on a glass plate as described above to form a coating film (Coating 7). The coating film obtained was evaluated on the physical properties. In Comparative Examples, a coating solution obtained by the polymerization of a monomer free of the unsaturated monomer (Monomer B), namely, a monomer consisting of Monomer A was used (Coating 8), or a coating solution obtained by the polymerization of monomers free of the unsaturated monomer (Monomer B) and consisting of Monomer A and an acrylic acid (Component 12) as a comonomer (Monomer C) was used (Coating 9). The coating formulations and results are shown in Table 2 below.

Table 2 - Coating and Evaluation Thereof (Cont.)

Example No.	2		3		
Coating No.	5	6 (Comparison)	7	8 (Comparison)	9 (Comparison)
Monomer A (parts by weight)	Component 2 3.0	Component 2 3.0	Component 3 3.0	Component 3 3.0	Component 3 3.0
Monomer B (parts by weight)	Component 10 0.09	-	Component 10 0.09	-	-
Monomer C (parts by weight)	-	-	-	Component 12 0.09	
Initiator (parts by weight)	0.09	0.09	0.09	0.09	0.09
Solvent) (parts by weight)	22	22	22	22	
Contact angle to water	110°	109°	106°	104°	105°
Contact angle to silicone oil	-	-	-	-	-
Contact angle to n-hexadecane	-	-	-	-	-
Pencil hardness	2B	<6B	6B	<6B	<6B
Water resistance	□	x	□	x	x

Example 4:

5 Using $C_6F_{13}C_2H_4OC(=O)CH=CH_2$ (Component 4) as the fluoroaliphatic group-containing unsaturated ester monomer (Monomer A) and $(C_2H_5O)_3SiCH=CH_2$ (Component 10) as the unsaturated silane monomer (Monomer B), a coating solution was produced as described in General Procedure in Production of Coating Composition and coated on a glass plate as described above to form a coating film (Coating 10). The coating film obtained was evaluated on the physical properties. In Comparative Example, a coating solution obtained by the polymerization of a monomer free of the unsaturated monomer (Monomer B), namely, a monomer consisting of Monomer A was used (Coating 11). The coating formulations and results are shown in Table 3 below.

Example 5:

Using $(\text{CF}_3)_2\text{CF}(\text{CF}_2)_2\text{C}_2\text{H}_4\text{OC}(=\text{O})\text{CH}=\text{CH}_2$ (Component 5) as the fluoroaliphatic group-containing unsaturated ester monomer (Monomer A) and $(\text{CH}_3\text{O})_3\text{SiCH}=\text{CH}_2$ (Component 9), $(\text{C}_2\text{H}_5\text{O})_3\text{SiCH}=\text{CH}_2$ (Component 10) or $(\text{CH}_3\text{O})_3\text{SiCH}_2\text{CH}=\text{CH}_2$ (Component 11) as the unsaturated silane monomer (Monomer B), a coating solution was produced as described in General Procedure in Production of Coating Composition and coated on a glass plate as described above to form coating films (Coatings 12, 13 and 14, respectively). The coating films obtained were evaluated on the physical properties. In Comparative Example, a coating solution obtained by the polymerization of a monomer free of the unsaturated monomer (Monomer B), namely, a monomer consisting of Monomer A, was used (Coating 15). The coating formulations and results are shown in Table 3 below.

Table 3 - Coating and Evaluation Thereof (Cont.)

Example No.	4		5			
Coating No.	10	11 (Comparison)	12	13	14	15 (Comparison)
Monomer A (parts by weight)	Component 4 3.0	Component 4 3.0	Component 5 3.0	Component 5 3.0	Component 5 3.0	Component 5 3.0
Monomer B (parts by weight)	Component 10 0.30	-	Component 10 0.3	Component 9 0.3	Component 11 0.3	-
Monomer C (parts by weight)	-	-	-	-	-	-
Initiator (parts by weight)	0.09	0.09	0.09	0.09	0.09	0.09
Solvent (parts by weight)	22	22	22	22	22	22
Contact angle to water	119°	116°	116°	119°	119°	122°
Contact angle to silicone oil	-	-	-	-	-	-
Contact angle to n-hexadecane	-	-	-	-	-	-
Pencil hardness	-	-	2H	9H	9H	6B
Water resistance	□	x	□	□	□	□

Example 6:

Using $\text{H}(\text{CF}_2)_4\text{CH}_2\text{OC}(=\text{O})\text{CH}=\text{CH}_2$ (Component 6) as the fluoroaliphatic group-containing unsaturated ester monomer (Monomer A) and $(\text{C}_2\text{H}_5\text{O})_3\text{SiCH}=\text{CH}_2$ (Component 10) as the unsaturated silane monomer (Monomer B), a coating solution was produced as described in General Procedure in Production of Coating Composition and coated on a glass plate as described above to form a coating film (Coating 16). In Comparative Example, a coating solution obtained by the polymerization of a monomer free of the unsaturated monomer (Monomer B), namely, a monomer consisting of Monomer A, was used (Coating 17). The coating formulations and results are shown in Table 4 below.

15

Example 7:

Using $\text{F}(\text{CF}_2)_4\text{C}_2\text{H}_4\text{OC}(=\text{O})\text{CH}=\text{CH}_2$ (Component 7) as the fluoroaliphatic group-containing unsaturated ester monomer (Monomer A) and $(\text{C}_2\text{H}_5\text{O})_3\text{SiCH}=\text{CH}_2$ (Component 10) as the unsaturated silane monomer (Monomer B), a coating solution was produced as described in General Procedure in Production of Coating Composition and coated on a glass plate as described above to form a coating film (Coating 18). The coating film obtained was evaluated on the physical properties. In Comparative Example, a coating solution obtained by the polymerization of a monomer free of the unsaturated monomer (Monomer B), namely, a monomer consisting of Monomer A, was used (Coating 19). The coating formulations and results are shown in Table 4 below.

Table 4 - Coating and Evaluation Thereof (Cont.)

Example No.	6		7	
Coating No.	16	17 (Comparison)	18	19 (Comparison)
Monomer A (parts by weight)	Component 6 3.0	Component 6 3.0	Component 7 3.0	Component 7 3.0
Monomer B (parts by weight)	Component 10 0.3	-	Component 10 0.15	-
Monomer C (parts by weight)	-	-	-	-
Initiator (parts by weight)	0.09	0.09	0.09	0.09
Solvent (parts by weight)	22	22	22	22
Contact angle to water	96°	94°	116°	100°
Contact angle to silicone oil	-	-	-	-
Contact angle to n-hexadecane	-	-	-	-
Pencil hardness	3B	<6B	3B	6B
Water resistance	-	-	□	□

5 Example 8:

Using $F(CF_2)_3CH_2OC(=O)CH=CH_2$ (Component 8) as the fluoroaliphatic group-containing unsaturated ester monomer (Monomer A) and $(C_2H_5O)_3SiCH=CH_2$ (Component 10) as the unsaturated silane monomer (Monomer B), a coating solution was produced as described in General Procedure in Production of Coating Composition and coated on a glass plate as described above to form a coating film (Coating 20). In Comparative Example, a coating solution obtained by the polymerization of a monomer free of the unsaturated monomer (Monomer B), namely, a monomer consisting of Monomer A, was used (Coating 21). The coating formulations and results are shown in Table 5 below.

Table 5 - Coating and Evaluation Thereof (Cont.)

Example No.	8	
Coating No.	20	21 (Comparison)
Monomer A (parts by weight)	Component 8 3.0	Component 8 3.0
Monomer B (parts by weight)	Component 10 0.15	-
Monomer C (parts by weight)	-	-
Initiator (parts by weight)	0.09	0.09
Solvent (parts by weight)	22	22
Contact angle to water	116°	119°
Contact angle to silicone oil	-	-
Contact angle to n-hexadecane	-	-
Pencil hardness	4H	5H
Water resistance	■	x

5 Example 9:

Using $(\text{CF}_3)_2\text{CF}(\text{CF}_2)_2\text{C}_2\text{H}_4\text{OC}(=\text{O})\text{CH}=\text{CH}_2$ (Component 5) as the fluoroaliphatic group-containing unsaturated ester monomer (Monomer A) and $(\text{CH}_3\text{O})_3\text{SiCH}=\text{CH}_2$ (Component 9) in four varied amounts as the unsaturated silane monomer (Monomer B), a

10 coating solution was produced as described in General Procedure in Production of Coating Composition and coated on a glass plate as described above to form coating films (Coatings 22, 23, 24 and 25, respectively). In Comparative

15 Example, a coating solution obtained by the polymerization of a monomer free of the unsaturated monomer (Monomer B), namely, a monomer consisting of Monomer A, was used (Coating 26). The coating formulations and results are shown in Table 6 below.

Table 6 - Coating and Evaluation Thereof (Cont.)

Example No.	9				
Coating No.	22	23	24	25	26 (Comparison)
Monomer A (parts by weight)	Component 5 3.0	Component 5 3.0	Component 5 3.0	Component 5 3.0	Component 5 3.0
Monomer B (parts by weight)	Component 9 0.3	Component 9 0.2	Component 9 0.1	Component 9 0.05	-
Monomer C (parts by weight)	-	-	-	-	-
Initiator (parts by weight)	0.09	0.09	0.09	0.09	0.09
Solvent (parts by weight)	22	22	22	22	22
Contact angle to water	119°	121°	123°	123°	122°
Contact angle to silicone oil	60°	66°	68°	72°	57°
Contact angle to n-hexadecane	79°	78°	81°	83°	-
Pencil hardness	9H	9H	8H	H	6B
Water resistance	■	■	■	■	■

5 Example 10:

Using $F(CF_2)_3CH_2OC(=O)CH=CH_2$ (Component 8) as the fluoroaliphatic group-containing unsaturated ester monomer (Monomer A) and $(CH_3O)_3SiCH_2CH=CH_2$ (Component 11) in four varied amounts as the unsaturated silane monomer (Monomer B), a coating solution was produced as described in General Procedure in Production of Coating Composition and coated on a glass plate as described above to form coating films (Coatings 27, 28, 29 and 30, respectively). In Comparative Example, a coating solution obtained by the polymerization of a monomer free of the unsaturated monomer (Monomer B), namely, a monomer consisting of Monomer A, was used (Coating 31). The coating formulations and results are shown in Table 7 below.

Table 7 - Coating and Evaluation Thereof (Cont.)

Example No.	10				
Coating No.	27	28	29	30	31 (Comparison)
Monomer A (parts by weight)	Component 8 3.0	Component 8 3.0	Component 8 3.0	Component 8 3.0	Component 8 3.0
Monomer B (parts by weight)	Component 11 0.3	Component 11 0.2	Component 11 0.1	Component 11 0.05	-
Monomer C (parts by weight)	-	-	-	-	-
Initiator (parts by weight)	0.09	0.09	0.09	0.09	0.09
Solvent (parts by weight)	22	22	22	22	22
Contact angle to water	116°	118°	122°	121°	120°
Contact angle to silicone oil	65°	68°	70°	74°	69°
Contact angle to n-hexadecane	71°	75°	80°	83°	76°
Pencil hardness	4H	H	3B	4B	5B
Water resistance	■	■	■	■	■

- 5 In the Tables, Monomer A is a fluoroalkyl-containing unsaturated ester monomer, Monomer B is a silane unsaturated monomer and Monomer C is a comonomer (acrylic acid). The initiator is azobisisobutyronitrile and the solvent is n-C₄F₉OC₂H₅.

10

Monomer A:

- Component 1: F(CF₂)₆CH₂OC(=O)C(CH₃)=CH₂
 Component 2: C₇F₁₅SO₂N(C₂H₅)C₂H₄OC(=O)C(CH₃)=CH₂
 Component 3: C-C₆F₁₁CH₂OC(=O)C(CH₃)=CH₂
 15 Component 4: C₆F₁₃C₂H₄OC(=O)CH=CH₂
 Component 5: (CF₃)₂CF(CF₂)₂C₂H₄OC(=O)CH=CH₂
 Component 6: H(CF₂)₄CH₂OC(O)CH=CH₂
 Component 7: F(CF₂)₄C₂H₄OC(=O)CH=CH₂
 Component 8: F(CF₂)₃CH₂OC(=O)CH=CH₂

Monomer B

Component 9: $(\text{CH}_3\text{O})_3\text{SiCH}=\text{CH}_2$ Component 10: $(\text{C}_2\text{H}_5\text{O})_3\text{SiCH}=\text{CH}_2$ Component 11: $(\text{CH}_3\text{O})_3\text{SiCH}_2\text{CH}=\text{CH}_2$

5 Monomer C

Component 12: acrylic acid

From the results shown above, it is seen that the coating film formed of the coating composition of the present invention using a copolymer containing an

10 unsaturated silane monomer has a contact angle (to water, silicone oil or n-hexadecane) equal to or greater than that of the coating film formed of a conventional coating composition using a copolymer free of an unsaturated silane monomer. At the same time, it also has high pencil hardness

15 and water resistance (see, for example, Examples 1 to 10, particularly Examples 1, 9 and 10). Thus, the coating composition of the present invention is verified to ensure improved adhesion property to a substrate while maintaining the water repellency/oil repellency equal to or greater than

20 that of conventional coating compositions. Furthermore, as seen from the results of Coating 2 of Example 1, even when a copolymer containing another comonomer such as acrylic acid in addition to the fluoroaliphatic group-containing unsaturated ester monomer (Monomer A) and unsaturated silane

25 monomer (Monomer B) is used, the pencil hardness and water resistance are improved and the adhesive property to a substrate is increased. Also, even when the amount of the unsaturated silane monomer added is as small as 1 wt% or slightly larger than that, the coating film obtained is

30 significantly improved in the pencil hardness (adhesion property to a substrate) (see, Example 9, Coatings 25 and 26, etc.).

What is claimed:

1. A coating composition comprising a copolymer
obtained by copolymerizing monomers comprising a
5 fluoroaliphatic group-containing unsaturated ester monomer
and an unsaturated silane monomer.

2. The coating composition as claimed in claim 1,
wherein said unsaturated silane monomer is selected from the
10 group consisting of vinyltrimethoxysilane,
vinyltriethoxysilane, vinyltriisopropoxysilane and vinyl-
tert-butoxysilane.

3. The coating composition as claimed in claim 1 or
15 2, wherein said unsaturated silane monomer is contained in
an amount of 1 to 50 wt% based on the total weight of said
fluoroaliphatic group-containing unsaturated ester monomer
and said unsaturated silane monomer.

20 4. The coating composition as claimed in any one of
claims 1 to 3, further comprising a hydrofluorocarbon ether
or a hydrofluorocarbon.

5. An article comprising a substrate having a surface
25 and a coating on at least a portion of said surface that
comprises the copolymerized product of a fluoroaliphatic
group-containing unsaturated ester monomer and an
unsaturated silane monomer.

30

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
23 May 2002 (23.05.2002)

PCT

(10) International Publication Number
WO 02/040603 A3

(51) International Patent Classification⁷: **C08F 220/24**,
220/38, 230/08, C09D 133/16, C08J 3/09, 7/04

(21) International Application Number: PCT/US01/47029

(22) International Filing Date:
9 November 2001 (09.11.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2000-350089 16 November 2000 (16.11.2000) JP

(71) Applicant (*for all designated States except US*): **3M IN-
NOVATIVE PROPERTIES COMPANY** [US/US]; 3M
Center, Post Office Box 33427, Saint Paul, MN 55133-
3427 (US).

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **YANOME, Hideto**
[JP/JP]; 11-2-103 Oyama 2-chome, Sagami-hara-city,
Kanagawa 229-11 (JP).

(74) Agents: **JORDAN, Robert, H.** et al.; Office of Intellectual
Property Counsel, Post Office Box 33427, Saint Paul, MN
55133-3427 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT (util-
ity model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA,
CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (util-
ity model), DE, DK (utility model), DK, DM, DZ, EC, EE
(utility model), EE, ES, FI (utility model), FI, GB, GD, GE,
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ,
LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,
MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD,
SE, SG, SI, SK (utility model), SK, SL, TJ, TM, TR, TT,
TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,
CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD,
TG).

Published:

— with international search report

(88) Date of publication of the international search report:
24 April 2003

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

(54) Title: WATER-REPELLENT, OIL-REPELLENT AND SOIL RESISTANT COATING COMPOSITION

(57) Abstract: A coating composition capable of providing a coating film which has sufficiently high water repellency, oil repellency and soil resistance and which ensures high adhesion property to a substrate. A coating composition comprising a copolymer obtained by copolymerizing monomers comprising a fluoroaliphatic group-containing unsaturated ester monomer and an unsaturated silane monomer.

WO 02/040603 A3

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 01/47029

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 C08F220/24 C08F220/38 C08F230/08 C09D133/16 C08J3/09
C08J7/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C08F C09D C08J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, CHEM ABS Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 016, no. 006, 9 January 1992 (1992-01-09) & JP 03 231986 A (NIPPON MEKTRON LTD.), 15 October 1991 (1991-10-15) abstract -----	1-5

☐

Further documents are listed in the continuation of box C.

☐

Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

24 September 2002

Date of mailing of the international search report

02/10/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Bettels, B

INTERNATIONAL SEARCH REPORT
Information on patent family members

International Application No

PCT/US 01/47029

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
JP 03231986	A	15-10-1991	JP	2854071 B2	03-02-1999